



Steering Wheel Controls With New JVC & Kenwood Radios

- Locate the main connector on the back of the radio. These radios use an ISO/EURO (1784 shell) radio connector. (Figure A)
- The SWC wire from the radio can be found in the bundle of wires above the main connector, labeled **REMOTE CONT.** (Figure B)
- This installation step will require a **10k ohm ¼ watt resistor** (sold separately). (Figure C)

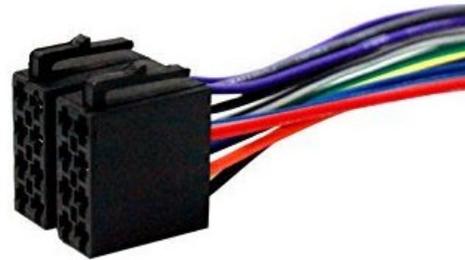

(Figure A)

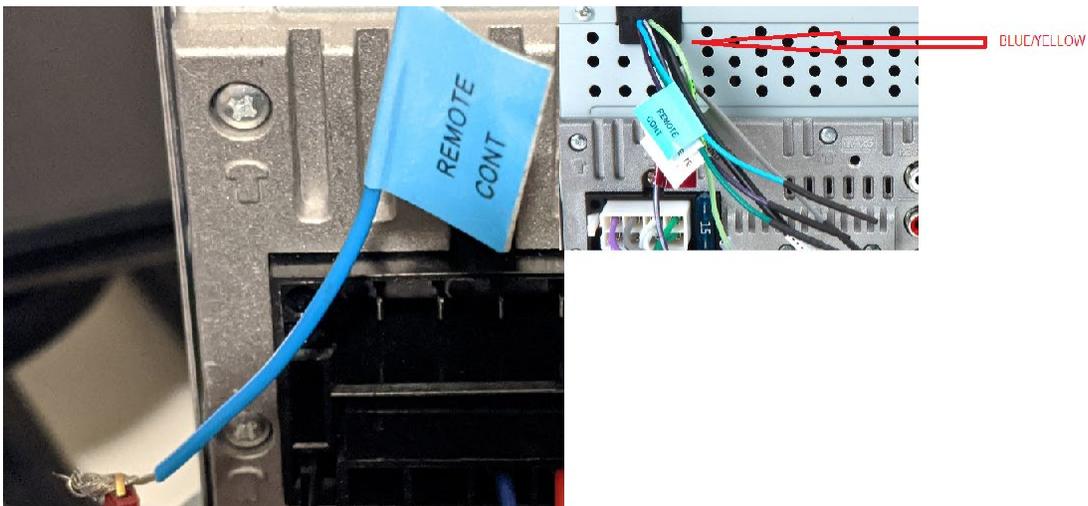

(Figure B)




(Figure C)

Installation Instructions

1. Connect one end of the resistor to the **Blue/Yellow** wire from the radio. Connect the other end of the resistor to the **Brown** wire from 3.5mm adapter included with the AXSWC. (Figure A)
2. Proceed with programming the steering wheel controls. Once the AXSWC interface shows the correct radio (5 LED flashes), remove the resistor.
3. Reconnect the **Blue/Yellow** and **Brown** wires without the resistor in place. (Figure B)
4. Test the steering wheel controls for proper functionality.
5. The installation is now complete.



(Figure A)

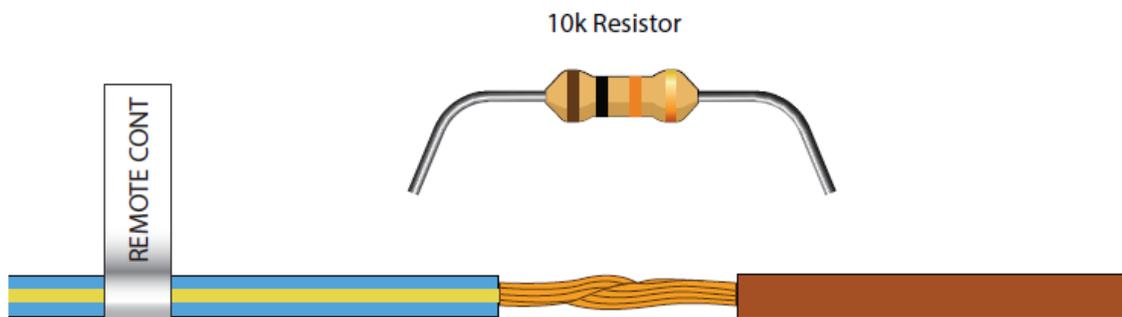

(Figure B)

Manual Program

As an alternative, the radio can also be manually programmed to the AXSWC interface.

1. Program the interface to the vehicle following the vehicle specific document.
2. Turn the radio off.
3. Cycle the key off, then back on.
4. Wait until the interface's light flashes **Green** one time then goes out.
5. Press and hold the **Volume Down** button on the steering wheel until the interface's light turns solid **Red**, then release. The light will then go out indicating that the interface is now in **Changing Radio Type** mode.
6. Press and hold the **Volume Up** button on the steering wheel until the interface's light turns solid **Red**, then release. Radio number 1 has now been programmed. Repeat this step four more times.
7. Press and hold the **Volume Down** button on the steering wheel until the interface's light turns solid **Red**. The light will remain solid **Red** for 3 seconds while it stores the new radio information. After the light goes out, turn the radio on and test the steering control wheel controls.
8. The installation is now complete.